

Pneumatic Valve Packaging Equipment

Fitting to pack the fluid powder or small grain ($\leq 5\text{mm}$), use the compressed air to make the motive power. The compressed air makes the material in the sealed container to flow through the atomizer, to fulfill the feeding function of the material. The sealed container adopts the gas rubber valve, people control the across volume through the valve to control the feeding quantity of the packing material, achieve the stable and effective packing accuracy and speed.

The production line can produce a variety of dry products: insulation mortar, adhesive mortar, cracking mortar, dry adhesives, self-leveling mortar, dry powder putty and other materials products

CBM-50A

自动阀口包装机

气压式阀口包装机适合于流动性较好的粉末或细小颗粒 ($\leq 5\text{mm}$) 的包装, 利用压缩空气为动力。

压缩空气通过雾化器 (气垫) 使密闭容器内的物料发生流化状态, 从而达到输送送料的作用。

密闭采用气动橡胶阀门, 通过控制阀门的通流面积, 以达到控制包装的物料的给料量, 实现有效和稳定的包装精度和速度。

该生产线可生产多种干粉产品: 保温砂浆、粘结砂浆、抗裂砂浆、干粉粘结剂、自流平砂浆、干粉腻子等多种干粉材料产品。




CBM-50A Pneumatic Valve Packaging Equipment

自动推袋包装机 Automatic push bag packaging machine :



该机自动化程度高, 操作简单, 配备新研发的自动卸袋装置, 只需工人插袋 (适应阀口袋) 即可完成包装生产工艺, 节省人工 (3-4人)、减轻工人劳动强度, 极大的降低生产成本, 提高生产效率。该生产线可生产多种干粉产品: 保温砂浆、粘结砂浆、抗裂砂浆、干粉粘结剂、自流平砂浆、干粉腻子等多种干粉材料产品。

The machine with high degree of automation, simple operation, with newly developed automatic bag unloading device, just needs workers insert the bag (adapt the valve bags) to complete the packaging production process, save labor (3-4 people), reduce labor intensity greatly reduce production costs and improve productivity. The production line can produce a variety of dry products: insulation mortar, adhesive mortar, cracking mortar, dry adhesives, self-leveling mortar, dry powder putty and other materials products.

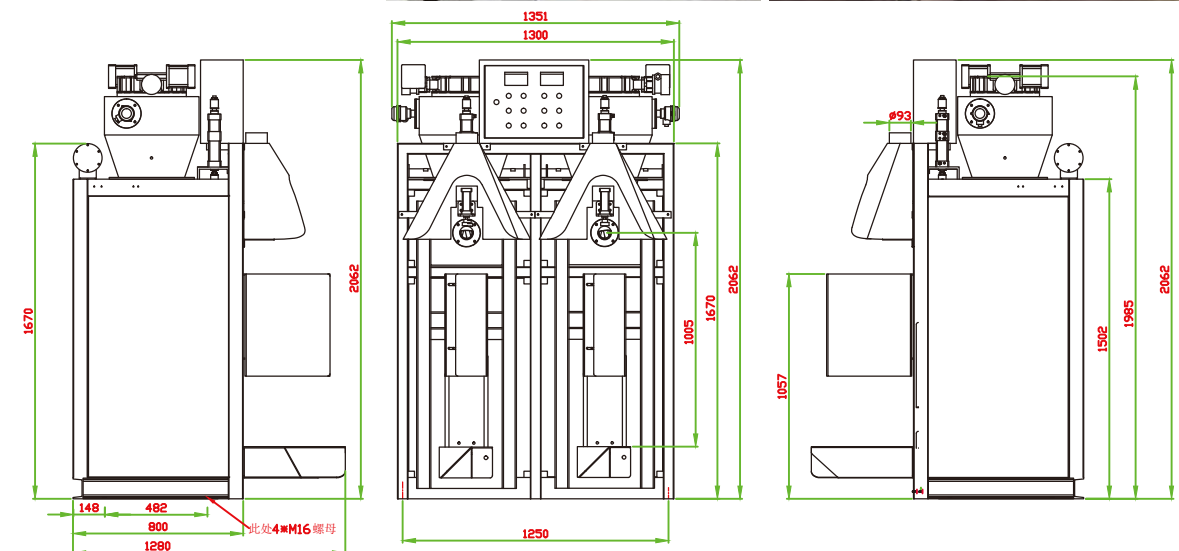

GLZON

GLZON

上海广志仪器设备有限公司

TEL: 021-60518382 FAX: 021-51862836

上海市松江区茸华路1150号

网址: <http://www.glzon.com>

CBM-50A 气压式粉料包装机

技术参数 Technical Parameters :

产品型号 Model	CBM-A1	CBM-A2	CBM-A3	CBM-A4
适用物料 Suitable material	流动性较好的粉末或细小颗粒（≤5mm）如水泥干粉砂浆 fluid powder or small grain(<=5mm), such as cement, sand, dry powder.			
称重形式 Weighing form	毛重 gross weight			
喷嘴数量 nozzle	单嘴Single nozzle	双嘴Double nozzle	三嘴Triplicate nozzl	四喷嘴fourfold nozzle
包装范围 Packing weight	10~50Kg			
包装精度 Accuracy	0.5kg			
包装袋 Bag form	阀口袋 Valve bag			
气源压力 Gas power	0.6MPa			
工作环境 Environment	温度：-20℃~45℃相对湿度：95%（无凝露） Temperature：-20℃~45℃relative humidity: 95% (none dew)			
电源电压 Power	AC220V 50Hz			
最大功率 Max power	0.1KW	0.2 KW	0.3 KW	0.4 KW
耗气量 Consumption	0.7m3/min	1.4 m3/min	2.1m3/min	2.8m3/min
外形尺寸 Dimension	650x1270x1600	1300x1270x1600	1950x1270x1600	2600x1270x1600
设备重量 Device weight	约About 600Kg	约About 1200Kg	约About 1800Kg	约About 2400Kg

产品特点 :

该机自动化程度高，操作简单，配备新研发的自动卸袋装置，只需工人插袋（适应阀口袋）即可完成包装生产工艺，节省人工（3-4人）、减轻工人劳动强度，极大的降低生产成本，提高生产效率。气压式阀口袋包装机适合于流动性较好的粉末或细小颗粒（≤5mm）的包装，利用压缩空气为动力。压缩空气通过雾化器（气垫）使密闭容器内的物料发生流化状态，从而达到输送给料的作用。密闭采用气动橡胶阀门，通过控制阀门的通流面积，以达到控制包装的物料的给料量，实现有效和稳定的包装精度和速度。该生产线可生产多种干粉产品：保温砂浆、粘结砂浆、抗裂砂浆、干粉粘结剂、自流平砂浆、干粉腻子等多种干粉材料产品。

- 1、进料端配有保压仓，顶端有气动蝴蝶阀或气动塞阀，保证了压力仓的充填率，提高了定量精度的可靠性
- 2、设备带有内置式收尘器，减少了环境内粉尘，有利于对操作人员的保护和环境的保护。
- 3、包装速度快，精度稳定
- 4、特别适合建材干粉砂浆包装

Products introduction:

The machine with high degree of automation, simple operation, with newly developed automatic bag unloading device, just needs workers insert the bag (adapt the valve bags) to complete the packaging production process, save labor (3-4 people), reduce labor intensity greatly reduce production costs and improve productivity. Fitting to pack the fluid powder or small grain (<=5mm), use the compressed air to make the motive power. The compressed air makes the material in the sealed container to flow through the atomizer, to fulfill the feeding function of the material. The sealed container adopts the gas rubber valve, people control the across volume through the valve to control the feeding quantity of the packing material, achieve the stable and effective packing accuracy and speed. The production line can produce a variety of dry products: insulation mortar, adhesive mortar, cracking mortar, dry adhesives, self-leveling mortar, dry powder putty and other materials products.

- 1 , the feed end with packing warehouse, top with pneumatic butterfly valve or pneumatic plug valve , pressure positions to ensure the filling rate and improve the reliability of the quantitative accuracy.
- 2, devices with built-in dust collector , reducing dust in the environment is conducive to the protection of the operator and the environment protection .
- 3 , packing with high speed, accuracy and stability.
- 4, especially for dry mortar Packaging Materials

CBM-50A Pneumatic Valve Packaging Equipment

双嘴包装机 Double nozzle Valve Packaging :



双嘴包装机是两台单嘴包装机拼合在一起的包装机，可以一个操作工人操作两台机器，更加节约人工，提高生产效率。
Double mouth packing machine is two single mouth packing machine piece together, an operating worker can operate two machines, more labor-saving, increase productivity.

产品尺寸 Products size:

